

Ballot box | Transport box with mailbox flap and lock - 600 x 400 x H 335 mm grey | Single-keyed lock



Product specifications

Weight (kg)	4,2 kg
External dimensions (L x W x H)	600 × 400 × 335 mm
Temperature range	-20°C to +80°C
Capacity	64 liter
Color	Grey
Material	PP
Bottom	Closed, extra reinforced base
Sidewalls	Closed
Handles	Closed
Colorcode	RAL 7040
Type of lock	Single-keyed cylinder lock (can only be opened with supplied keys)
Load capacity (kg)	25 kg
Max. stacking load (kg)	250 kg
Internal dimensions (L x W x H)	566 × 366 × 305 mm

Properties

Lidded bins are also stackable with lid	
Lidded bins have a removable, hinged lid	

With lock and slot in the lid

Stacking bin with hinged lid and 2 snap-slide locks



Transoplast +31(0)314 66 44 00 website@transoplast.com dev.transoplast.com

Description

Plastic ballot box 600 x 400 x H 335 mm with suitcase handles, cylinder lock, and letterbox flap in the lid. Ideal as a transport box for the transportation of postal votes. The transport box has a capacity of 64 liters. The ballot box is sealed with a lid equipped with a lock. The lid has a letterbox flap in the middle with a slot through which the ballot papers and voting letters can be inserted into the box. The contents of the ballot box are accessible after unlocking the hinged lid. The lid can also be additionally sealed on the short sides. The size of the slot (280x32 mm - w x h) is large enough for the intake of ballot papers (folded approximately 70 mm wide) and voting letters (unfolded 162 mm). The ballot box is equipped with an extra reinforced bottom, two suitcase handles, and hinge reinforcements for the hinged lid. The ballot boxes and transport boxes from Transoplast are stackable and can be conveniently moved using the handles on the short sides. Upon request, we supply the ballot boxes with logo and/or text printing. Inquire about the possibilities.




Matching accessories



Alternatieve artikelen

30.424.DB.1-4

30.424.DB.1-3

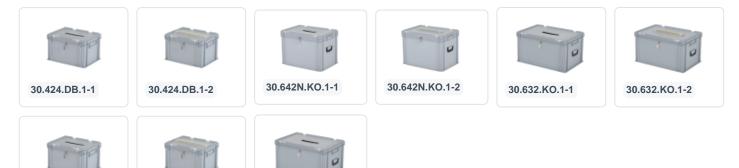

30.632.KO.1-3



Transoplast +31(0)314 66 44 00 website@transoplast.com dev.transoplast.com