




Industrial pallet - CR3 ECO - 1200 x 1000 mm (with rims)

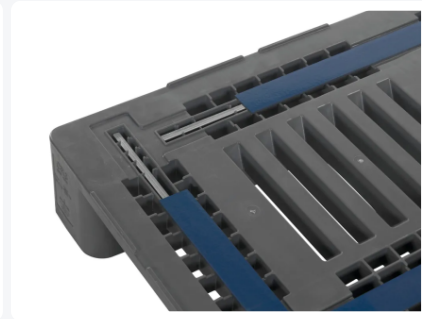

Product specifications

| | |
|------------------------|-------------------------------------|
| Uitwendig (LxBxH) | 1200 x 1000 x 160 mm |
| Dynamic load capacity | 1250 kg kg |
| Material | Recycled ECO-HDPE |
| Article number | 83335241 |
| Weight (kg) | 19,5 kg |
| Temperature range | -30°C to +40°C, briefly up to +90°C |
| Color | Black |
| Static load capacity | 5000 kg kg |
| Edge height | 5 mm mm |
| Load capacity in racks | 850 kg |

Properties

TC pallets runners are chamfered on both edges

Connections of the pallet chocks to the runners and the pallet surface are extra reinforced. Breakage at these sensitive points is thus reduced to a minimum

Intelligent design of the pallet chock ensures better grip of wrapping and stretch film

The TC pallet's patented weld geometry guarantees a high load capacity and long lifetime

Top and bottom pallet surface are completely smooth and unperforated without external rib structures

Very high load capacity that is upgradable to 1750 kg in pallet racks using reinforcing sections: on request

Raised rims around the TC3-5 prevent the load sliding off and mutual sliding of empty pallets

Description

Industrial pallet / block pallet type CR3 ECO (1200 x 1000 x H 160 mm) made from ECO-regenerated material. Equipped with 3 pallet runners lengthwise, closed bottom blocks, and open pallet runners (ribbed). With raised edges all around (5 mm), without anti-slip strips. Static load capacity is 5000 kg, dynamic load capacity is 1250 kg, and in pallet racks it is 850 kg.

Alternatieve artikelen

