



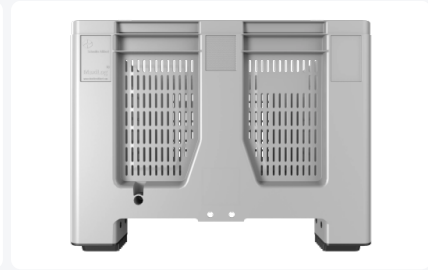

Plastic palletbox MaxiLog - 1200 x 1000 mm - on 4 feet - Grey - Perforated

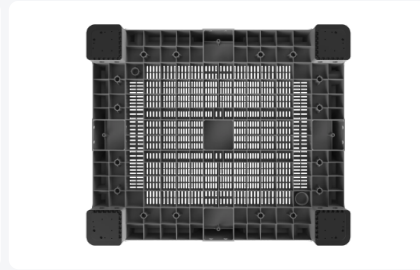

Product specifications

| | |
|----------------------------|----------------------|
| Uitwendig (LxBxH) | 1200 x 1000 x 760 mm |
| Inwendig (LxBxH) | 1108 x 908 x 574 mm |
| Capacity | 610 liter liter |
| Sidewalls | Perforated |
| Material | HDPE |
| Article number | 4429.400.502 |
| Weight (kg) | 30,9 kg |
| Temperature range | -30°C to +70°C |
| Color | Grey |
| Bottom | Perforated |
| Colorcode | RAL 7040 |
| Max. load capacity per box | 450 kg kg |
| Max. static stacking load | 4500 kg kg |
| Max. dynamic stacking load | 500 kg kg |
| Surface | Perforated |
| Load capacity (kg) | 450 kg |

Properties

Versatile transport solution for food and bulk goods.

Outlet valve ready; 1- and 2-inch drain valves can be added.

UN-approved versions available for dangerous goods.

Stackable design with corner stacking features for safe storage.

Smooth, easy-to-clean surfaces.

Compatible with automated handling systems.

Robust and sturdy, designed for industrial processing.

Fully recyclable at the end of its long service life.

SmartLink technology option for tracking and tracing.

Available in solid or ventilated versions, with 4 feet, 2 or 3 runners.

Description

The MaxiLog 1200x1000x760 - on 4 feet, Ventilated pallet box is an ideal solution for transporting food or large-volume bulk goods. The reinforced base design minimizes base deformation, ensuring product integrity.

The pallet box can be stacked up to 10 units high, providing efficient storage and transport. Smooth surfaces make the box easy to clean and hygienic for use. It is available in both solid and ventilated versions, with 4 feet, 2 or 3 runners. UN-approved versions are also available for transporting dangerous goods by road, sea, and air.

